

36" Rangetop with Grill

Model: KMR 1135 G / KMR 1135 LP



KMR 1135 G / KMR 1135 LP

Features:

- Backlit percision knobs
- M Pro dual stacked burner system with TrueSimmer
- M Pro Grill
- ComfortClean dishwasher-safe grates
- Clean Touch Steel™ front

SPECIFICATIONS

KMR 1135 G — Item 26113550USA

KMR 1135 LP — Item 26113551USA

Overall Unit Width 35¹⁵/₁₆" (912 mm)

Overall Height from the base of the appliance to the top, not including grates 7¹/₂" (191mm)

Overall Unit Depth to the front of control panel 26¹/₂" (673mm)

Niché

Minimum Cabinet Width 36" (914 mm)

Minimum Cabinet Depth to back of control panel 25¹/₁₆" (636.6mm)

Burners

Gas Burners: (1) 12,500 BTU; (3) 19,500 BTU

Grill: (1) 15,500 BTU

Total BTU Output: 86,500 BTU

Gas Line Connection 1/2" NPT

Electrical

Electrical Requirements 120V, 60Hz, 15 Amps

Power Cord Yes - NEMA 5-15 plug, 4ft. (1.2m) long

Shipping

Shipping Weight 145.5 lbs. (66kg)

Support

Call 800.843.7231

20/20 2020technologies.com


36" Rangetop with Grill

Model: KMR 1135 G / KMR 1135 LP




PRODUCT VIEWS


Front View

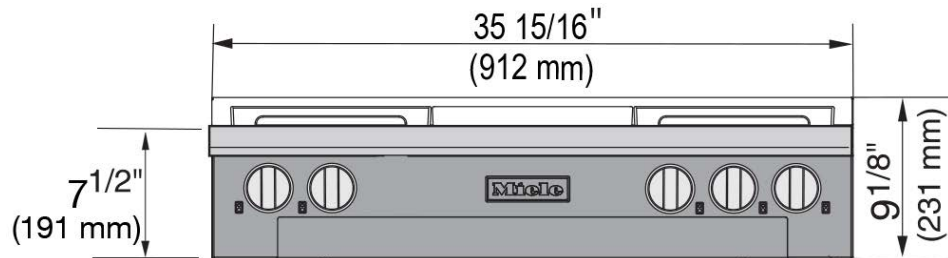

Side View

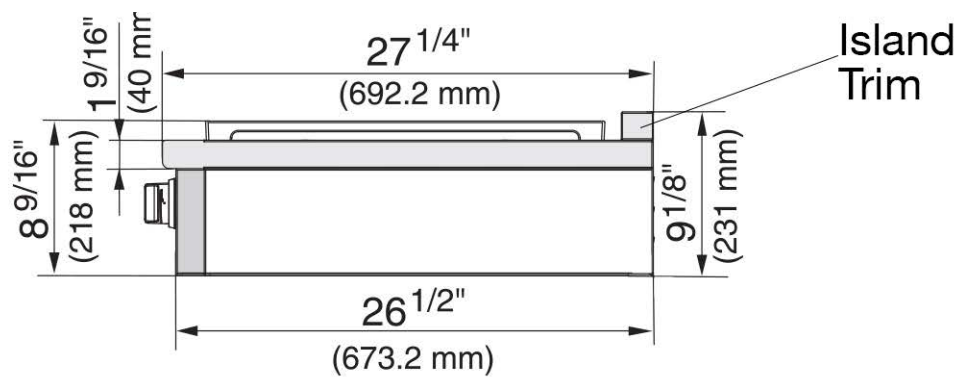

Rear View

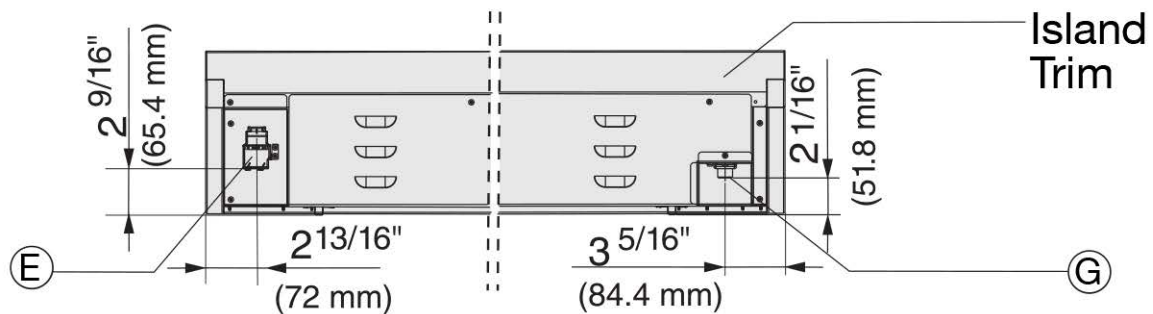

Length of power cord is 4 ft.(1.2m)

E = Electrical connection


G = Gas connection

36" Rangetop with Grill
Model: KMR 1135 G / KMR 1135 LP



PRODUCT VIEWS

Cabinet View

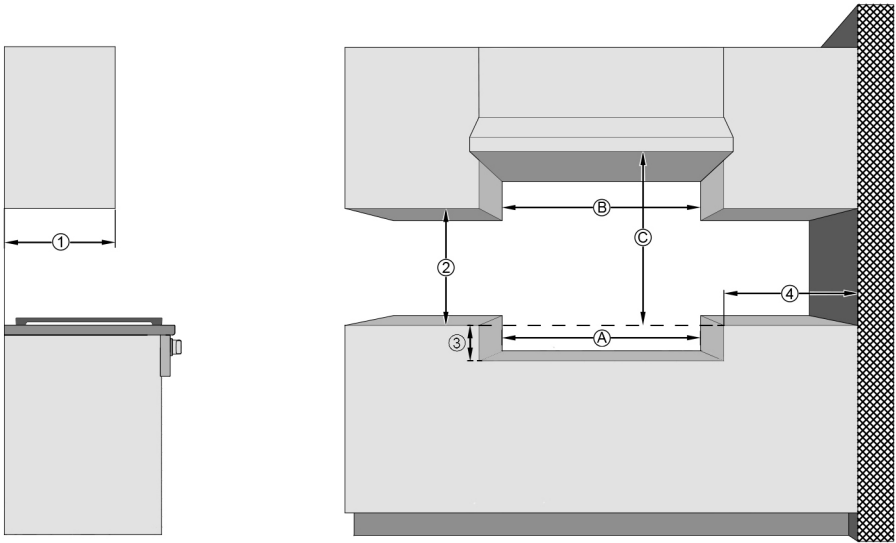

Ⓑ In case of combustible construction, an additional minimum clearance of 6" (each side) is necessary.

Position	Dimension	Description
①	13" (330 mm)	Maximum depth of top cabinet
②	18" (457 mm)	Minimum distance to bottom edge of top cabinet
③	7 1/2" (191 mm)	Distance top edge of worktop to top edge of platform
④	10" (254 mm)	Minimum distance to combustible surfaces
Ⓐ	36" (914 mm)	Width of cabinet opening
Ⓑ	6" + Ⓐ + 6"	In case of the presence of combustible material an additional minimum clearance of 6" (each side) is necessary. Ensure local codes are observed.
Ⓒ	37" (940 mm)	Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface.
	36" (910 mm)	Minimum distance between the top of the cooking area and the bottom of the Miele Range Hood (DAR model with DRxB XL Blower).
	30" (760 mm)	Minimum distance between the top of the cooking area and the bottom of the Miele Range Hood (DAR model with DRxB XXL Blower).
	For all other Hoods, please consult with manufacturer's instructions for required distances.	

For gas and electrical connections, see Rear Product View